

PEDO C

Stainless Steel Submersible Pump For Clean Water



Range of Performance

- Flow rate up to $21 \text{ m}^3/\text{h}$
- Head up to 19 m

Limits of Use

- Submersion depth up to 5 m
- Liquid temperature up to $+ 35^\circ\text{C}$
- Continuous duty S1 type


Installation and Use

- For clean or slightly dirty water.
- For draining rooms, or emptying tanks.
- Extraction of water from ponds, streams, or pits and for rain water collection.
- For Irrigation purpose.

PEDO C - Stainless Steel Submersible Pump For Clean Water

Construction Characteristics

- Casing: Stainless Steel AISI 304
- Impeller: Stainless Steel AISI 304
- Shaft: Stainless Steel AISI 304
- Mechanical seal Carbon-Ceramic-NBR
- Motor: for continuous duty
Single-phase 220-240 V - 50 Hz with capacitor and thermal overload protector
- Insulation: class F
- Protection: IP68

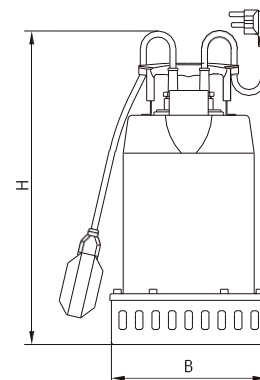

PERFORMANCE DATA

Model	Power (kW)	Outlet (mm)	Max.flow (l/min)	Max.head (m)	Max.grain size (mm)	G.W. (kg)	Carton size (cm)	DN	B (mm)	H (mm)
PEDO C 550F	0.55	40	250	13	10	9.8	42.5x26.0x30.0	G1½"	211	360
PEDO C 750F	0.75	40	267	14.5	10	10.5	40.5x26.0x30.0	G1½"	211	360
PEDO C 1100F	1.1	40	316	18	10	12	42.0x26.0x30.0	G1½"	211	375
PEDO C 1500F	1.5	40	350	19	10	13	42.0x26.0x30.0	G1½"	211	375



KSB Pumps Company Limited
16/2, Sir Aga Khan Road, Lahore, Pakistan
UAN: +92-42-111-572-786, Tel: +92-42-36304173-4
Fax: +92-42-36366192, 36368878
Email: info@ksb.com.pk, www.ksb.com.pk